


Ports	Orifice size [mm]	Kv [l/min] water (p = 1 bar)	Differential pressure [bar]		Material		Mass [kg]	Coil type	Model	Voltage	Power [W]	Order code
			min	max	body	seal						
G1/4	1.2	0.8	0	70	Brass	NBR	0.33	TM35	XD33NO	24 V DC	18	331117

**NOTES:**

- INOX valve bodies, other voltages and sealing materials available.
- Please note that maximum differential pressure is lower when DC coil is used!

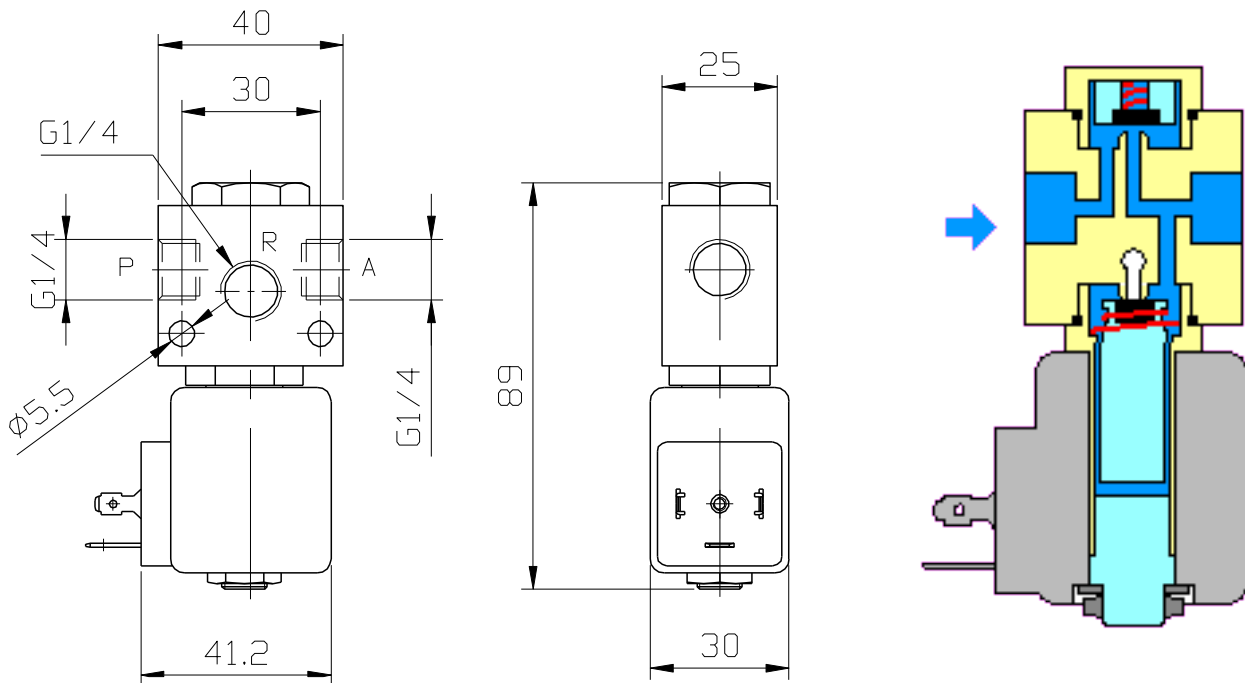

**FUNCTION:**

P = supply port (IN)  
A = working port (OUT)  
R = exhaust port

Coil de-energised: path P-A open, path A-R closed.  
Coil energised: path P-A closed, path A-R open.

